

FIG. 1

| 21 \ | 22 \ | 23 \ | 24 | |
|---------|-----------------------|----------|---------------|--|
| NO | PACKET HEADER PATTERN | QUEUE ID | PRIORITY INFO | |
| 1 | TCP PACKET PATTERN | "16A" | "1" | |
| 2 | UDP PACKET PATTERN | "16B" | "0" | |
| : | | | | |
| N | DESTINATION ADDRESS | "16B" | "1" | |

FIG. 2




FIG. 3




FIG. 4




FIG. 5





FIG. 6

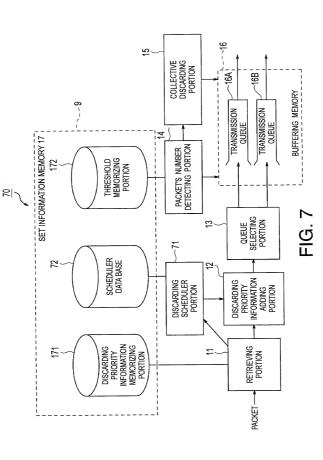

| 81 | PRIORITY INFO. COUNTED VALUE | | | |
|------|------------------------------|---|---|-------|
| 24 | PRIORITY INFO. | | | |
| ~ 23 | QUEUE ID | | | |
| 25 ~ | PACKET HEADER PATTERN | | | |
| 21 | 9 | - | 2 | z |

175

FIG.8

| 21 | 91 | 23 | 24 |
|----|------------------|----------|----------------|
| NO | CONNECTION TABLE | QUEUE ID | PRIORITY INFO. |
| 1 | | | |
| 2 | | | |
| : | | | |
| N | | | |

FIG. 9